




Residential | Commercial


Designed & Engineered in Silicon Valley 370W | 365W | 360W

Our DNA™ Split Cell Series impressively combines advanced solar technologies to maximize performance. Our patented Dual Nano Absorber (DNA™) Technology allows the panel to operate at high-efficiencies in extreme temperatures. Contact our sales team today to learn more about our line of high-efficiency solar panels.

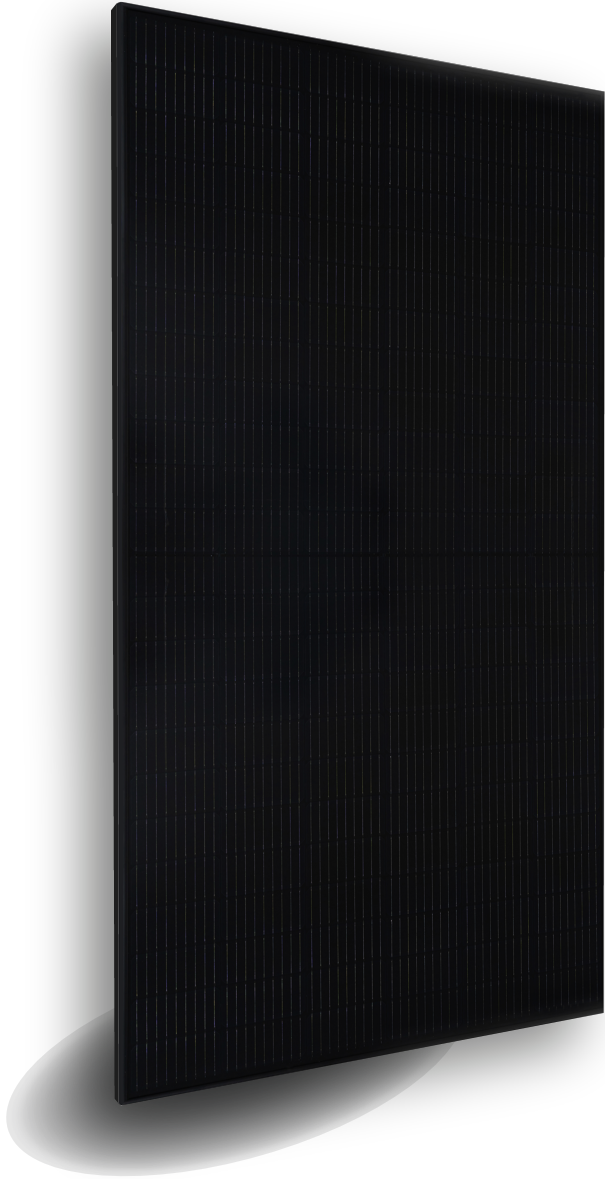

 Patented DNA™ technology boosts power performance & module efficiency

 Advanced split cell technology with 9 ultra-thin busbars allows for less resistance and more photon capture

 Ideal solution for applications affected by shading

 All-black design for pristine aesthetics
No excessive silver bussing or ribbons

 Robust product design is resilient in extreme weather. Up to 5400 Pa snow load and 6200 Pa wind load




30 Year Warranty


3X IEC Standards

RETC Top Perform-

Linear Performance Warranty

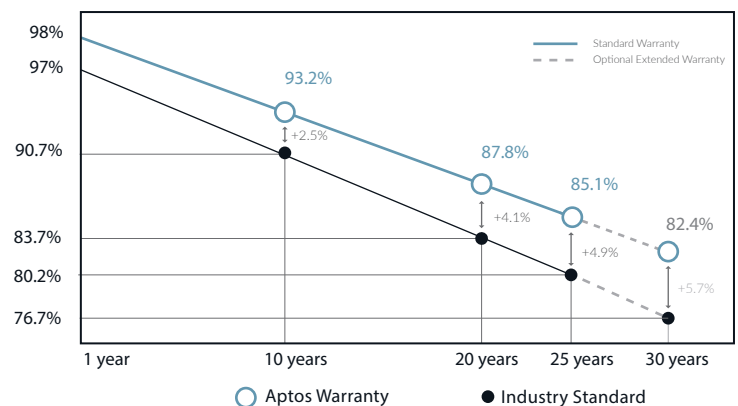

8207 Callaghan Rd, Ste 100,
San Antonio, Texas 78230
www.aptosolar.com
info@aptosolar.com

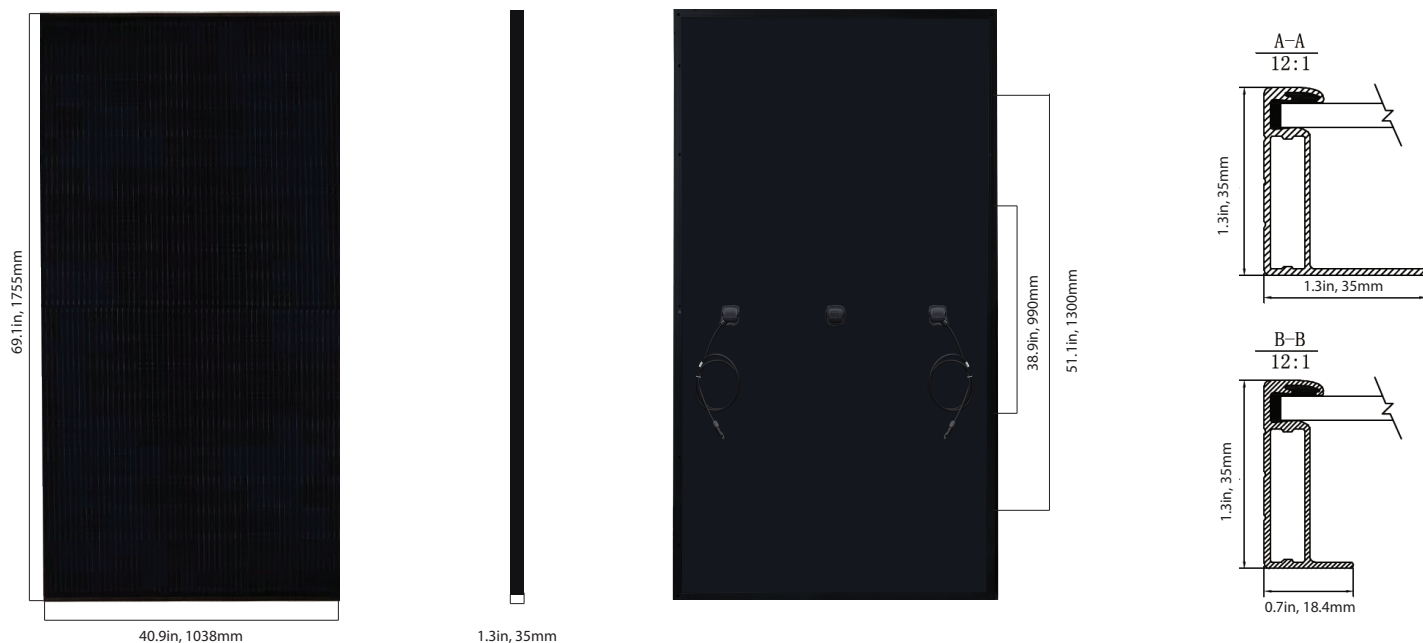

Electrical Specifications

	DNA-120-MF26-360W	DNA-120-MF26-365W	DNA-120-MF26-370W
STCrated Output P_{mmp} (W)	360W	365W	370W
Module Efficiency	19.73%	20.01%	20.29%
Open Circuit Voltage V_{voc} (V)	41.50	41.7	41.9
Short Circiut Current I_{sc} (A)	11.15	11.22	11.29
Rated Voltage V_{mmp} (V)	34	34.20	34.40
Rated Current I_{mmp} (A)	10.59	10.68	10.76

Standard Test Conditions for front-face of panel: 1000 W/m², 25°C, measurement uncertainty $\leq 3\%$

Temperature Coefficients

Temperature Coefficients P_{mmp}	-0.27%
Temperature Coefficients I_{sc}	+0.048%/°C
Temperature Coefficients V_{oc}	-0.35%/°C
Normal Operating Cell Temperature (NOCT)	45°C

Test Operating Conditions

Maximum Series Fuse	20A
Maximum System Voltage	1,500 VDC (UL&IEC)
Maximum Load Capacity (Per UL 1703)	5400 Pa Snow Load / 6200 Pa Wind Load
Fire Performance Class	Class C/Type 1


Packaging Configuration

Number of Modules per Pallet	31
Number of Pallets per 40ft. Container	26
Pallet Dimensions	1780 X 1125 X 1171 mm
Pallet Weight (kg)	653
Container Weight (kg)	17923

Mechanical Properties

Cell Type	Monocrystalline
Glass	3.2mm, anti-reflection coating, high transmission, low iron, tempered glass
Frame	Anodized Aluminum Alloy
Junction Box	IP68
Dimensions	69.0 X 40.9 X 1.3in, 1755 X 1038 X 35mm
Weight	44.0lbs, 20.0kg
Output Cable	4mm ² (EU) 12AWG
Cable Length	47.24in, 1200mm
Encapsulant	POE
Connector Type	Staubli EVO2

I-V Curve

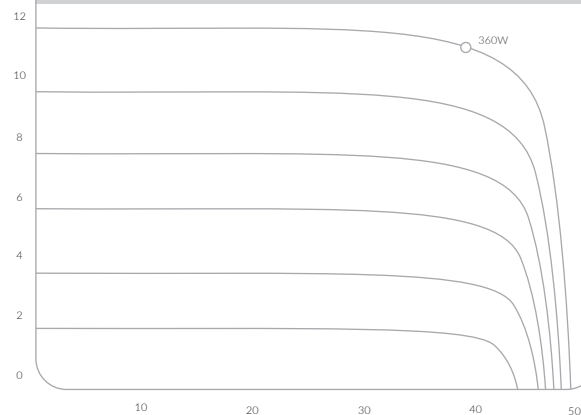

Certifications

