


DNA-144


SILVER FRAME, WHITE BACKSHEET


410W | 405W | 400W



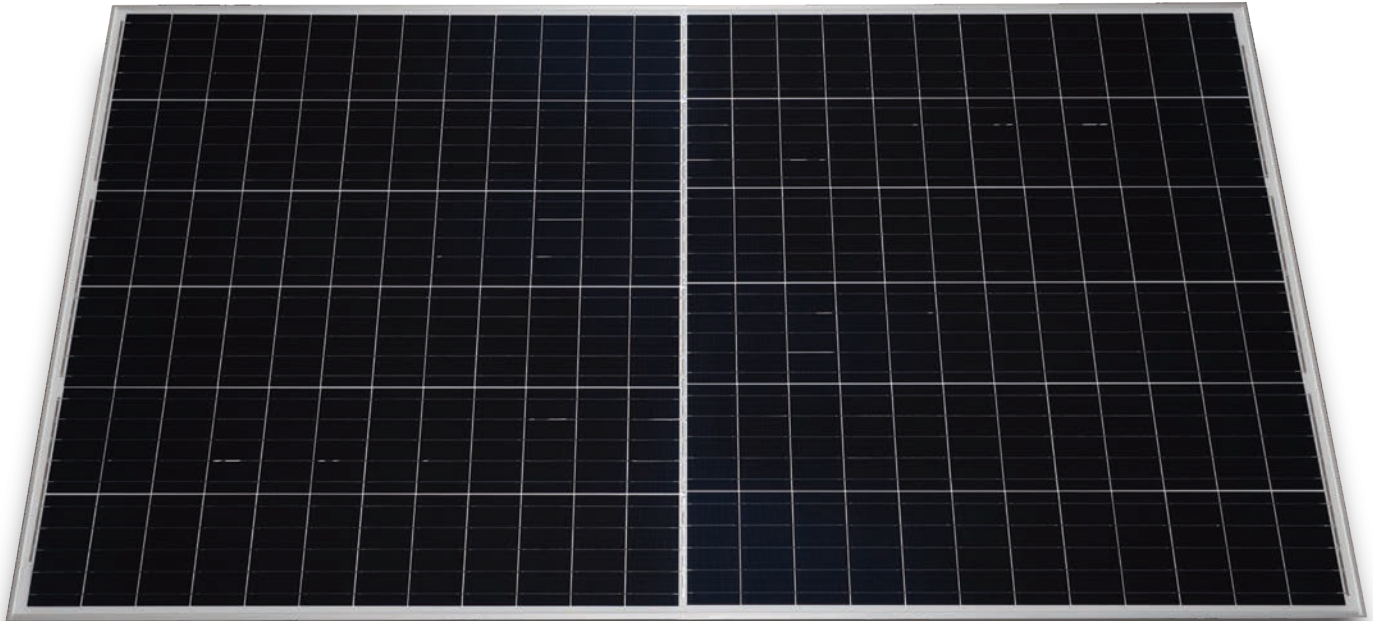

Maximize Energy Production

High-efficiency, half-cut cell panel

 Advanced technology boosts power generation


 Designed & engineered for extreme weather
5400 Pa snow load
5400 Pa (210 mph) wind load

 Ideal solution for applications affected by shading

 25 year warranty
Extended reliability

Our DNA Half-cut Cell Series impressively combines advanced technologies to maximize performance. Our patented DNA, Dual Nano Absorber, technology allows for the panel to operate at high efficiencies in high temperature environments.

25 Year Linear Performance Warranty

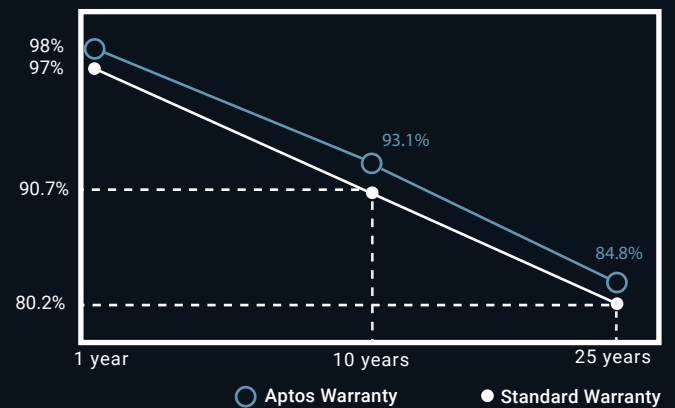

Factory Certifications



Product Certifications





DNA-144

SILVER FRAME, WHITE BACKSHEET
HIGH EFFICIENCY, HALF-CUT CELL PANEL



ELECTRICAL SPECIFICATIONS (+3%/-0%)

	DNA-144-MF23-400W	DNA-144-MF23-405W	DNA-144-MF23-410W
STCrated output P_{mpp} (W)	400	405	410
Module Efficiency	19.76%	20.00%	20.26%
Open Circuit Voltage V_{oc} (V)	48.55	48.73	48.91
Short Circuit Current I_{sc} (A)	10.64	10.71	10.79
Rated Voltage V_{mpp} (V)	40.77	40.95	41.12
Rated Current I_{mpp} (A)	9.81	9.89	9.97

Standard Test Conditions for front-face of panel:
1000 W/m², 25 °C, measurement uncertainty ≤3%


TEMPERATURE COEFFICIENTS

Temperature Coefficients P_{mpp}	-0.36%/°C
Temperature Coefficients I_{sc}	+0.046%/°C
Temperature Coefficients V_{oc}	-0.306%/°C
Normal Operating Cell Temperature (NOCT)	45°C


TEST OPERATING CONDITIONS

Maximum Series Fuse	20A
Maximum System Voltage	1,500 VDC (UL&IEC)
Maximum Load Capacity (Per UL1703)	Front Load: 5400 PA Snow load / 113 PSF / 2444 lbs. Rated Load Rear Load: 5400 PA Wind load / 113 PSF / 210 MPH Rated Load
Fire Performance Class	Class C/Type 1

MODULE DIMENSIONS

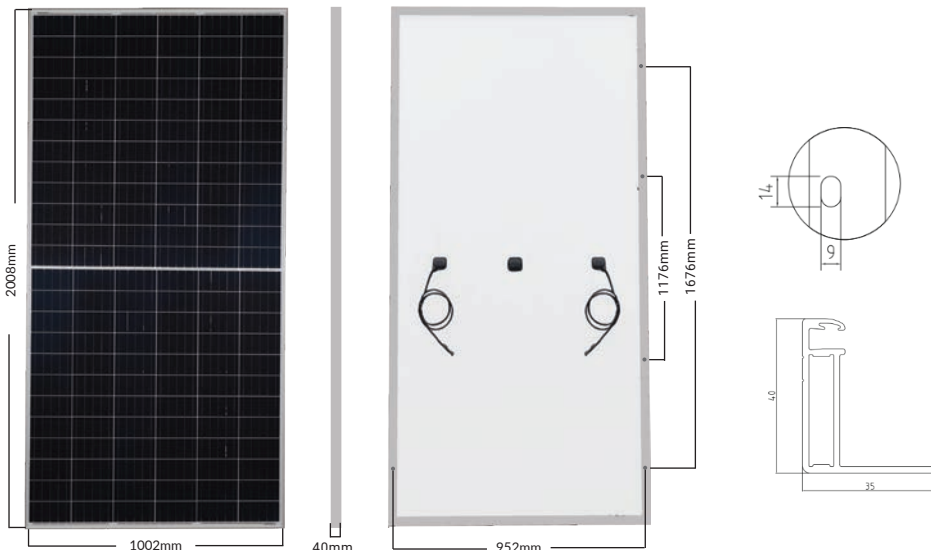

I-V CURVE

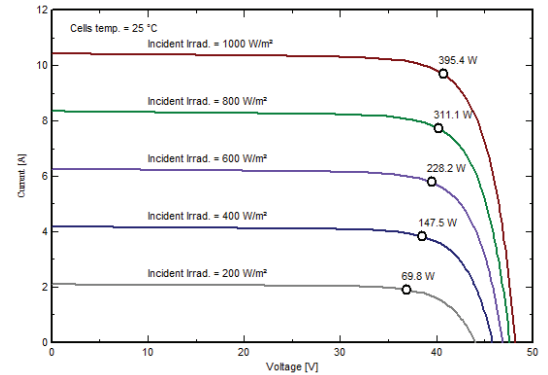

MECHANICAL PROPERTIES

Cell Type	Monocrystalline
Glass	Low Iron, Tempered
Frame	Anodized Aluminum Alloy
Junction Box	IP67
Dimension	2008 x 1002 x 40mm
Output Cable	4mm ² (EU)12AWG, 39.37in(1200mm)
Weight	50.7lbs.(23kg)
Cable Length	1200mm

PACKAGING CONFIGURATION

Number of Modules per Pallet	27
Number of Pallets per 40ft HQ Container	22
Pallet Dimensions (mm)	2050 X 1140 X 1140
Pallet weight (kg)	680
Container weight (kg)	14960

PRODUCT CERTIFICATIONS



8207 Callaghan Rd, Ste. 100
San Antonio, Texas 78230
www.aptoossolar.com | info@aptoossolar.com

DNA-144-MF23-XXXW
RESIDENTIAL | COMMERCIAL | UTILITY