

DNA-120

ALL-BLACK BI-FACIAL DESIGN

330W | 325W | 320W



Maximize Energy Production

High-efficiency, Bi-facial half-cut cell panel

 Produce up to 30% more energy with rear-side generation


 Designed & engineered for extreme weather
5400 Pa snow load
5400 Pa (210 mph) wind load

 All-black design for pristine aesthetics

 25 year extended product warranty*
30 year extended peak power warranty*

Our DNA Half-cut Cell Series impressively combines advanced technologies to maximize performance. Produce up to 30% more energy with the bi-facial rear side generation. Our patented DNA, Dual Nano Absorber, technology allows for panel to harvest energy from all directions and operate exceptionally in high heat temperatures.

Linear Performance Warranty

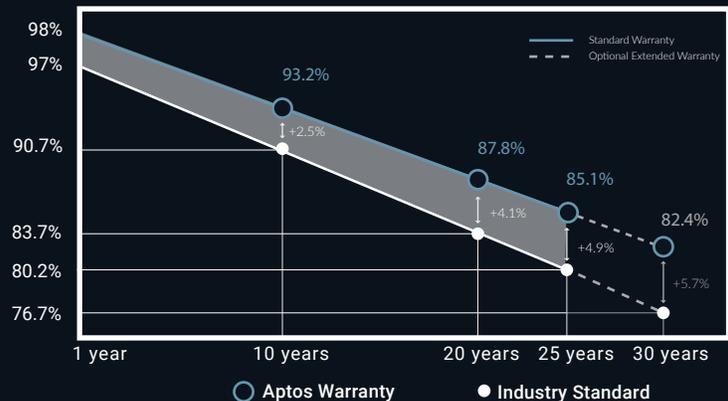


Factory Certifications



Product Certifications



*Aptos Solar Technology solar panels come with a standard 15 product warranty and 25 year peak power warranty. Customers must select optional warranty upgrade package to qualify extended 25 year product warranty and extended 30 year peak power warranty.



DNA-120

BLACK FRAME, TRANSPARENT BACKSHEET
HIGH EFFICIENCY, BI-FACIAL HALF-CUT CELL PANEL



ELECTRICAL SPECIFICATIONS (+3%/-0%)

	DNA-120-BF23-320W	DNA-120-BF23-325W	DNA-120-BF23-330W
STCrated output P_{mpp} (W)	320	325	330
Module Efficiency	18.85%	19.13%	19.43%
Open Circuit Voltage V_{oc} (V)	40.21	40.3	40.39
Short Circuit Current I_{sc} (A)	10.06	10.15	10.25
Rated Voltage V_{mmp} (V)	32.96	33.1	33.24
Rated Current I_{mmp} (A)	9.73	9.82	9.93

Standard Test Conditions for front-face of panel:
1000 W/m², 25 °C, measurement uncertainty $\leq 3\%$


TEMPERATURE COEFFICIENTS

Temperature Coefficients P_{mpp}	-0.36%/°C
Temperature Coefficients I_{sc}	+0.046%/°C
Temperature Coefficients V_{oc}	-0.306%/°C
Normal Operating Cell Temperature (NOCT)	45 °C


TEST OPERATING CONDITIONS

Maximum Series Fuse	20A
Maximum System Voltage	1,500 VDC (UL&IEC)
Maximum Load Capacity (Per UL1703)	Front Load: 5400 PA Snow load / 113 PSF / 2052 lbs. Rated Load Rear Load: 5400 PA Wind load / 113 PSF / 210 MPH Rated Load
Fire Performance Class	Class C/Type 1

MODULE DIMENSIONS

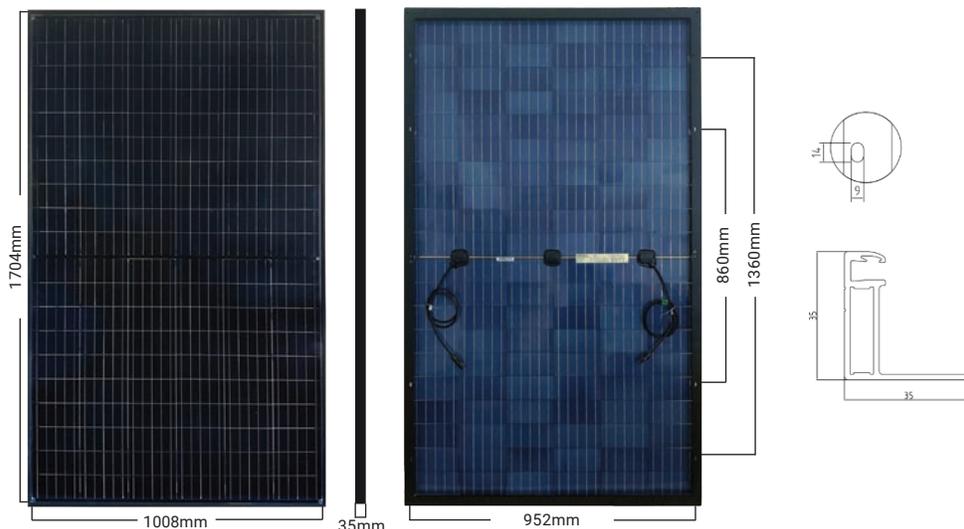

I-V CURVE

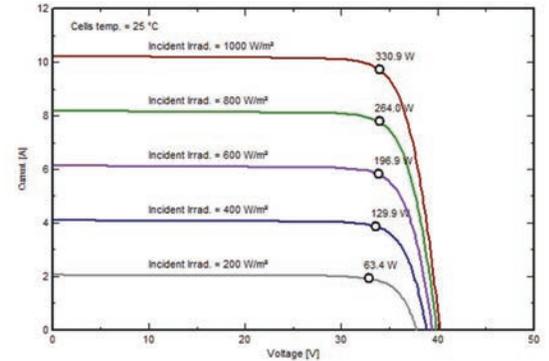

BI-FACIAL OUTPUT

P_{mpp} (W) at STC	330	335	340
Bi-facial Boost 5%	342	347	352
Bi-facial Boost 10%	353	358	364
Bi-facial Boost 15%	365	370	376

MECHANICAL PROPERTIES

Cell Type	Monocrystalline
Glass	Low Iron, Tempered
Frame	Anodized Aluminum Alloy
Junction Box	IP67
Dimension	1704 x 1008 x 35 mm
Output Cable	4mm ² (EU)12AWG, 39.37in(1000mm)
Weight	43.0lbs.(19.5kg)
Cable Length	1200mm

PACKAGING CONFIGURATION

Number of Modules per Pallet	30
Number of Pallets per 40ft HQ Container	26
Pallet Dimensions (mm)	1720X 1140 X 35
Pallet weight (kg)	620
Container weight (kg)	16120

Aptos Solar Technology reserves the right to make specification changes without notice

4502 Center view Dr. Ste 100
San Antonio, TX 78228
www.aptoossolar.com | info@aptoossolar.com

DNA-120-BF23-XXXW
RESIDENTIAL | COMMERCIAL