



DNA-144-BF10-550W-DG


540W | 545W | 550W

COMMERCIAL

Our DNA Split Cell Series uses advanced selective emitter PERC technology with thin film layers to improve heat tolerance, maximize energy harvest, minimize resistive loss, and use 5% more of the available active area for optimal power performance.

Linear Performance Warranty

Industry Leading 30 Years Product and Performance Warranty.

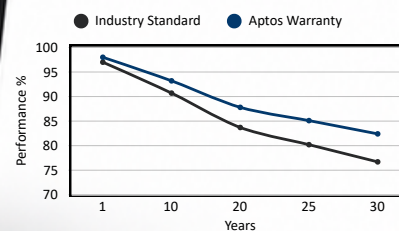

Certifications:



Key Features:






100% American Owned Company

Aptos products are designed and sourced to meet FEOC compliance requirements.

For FEOC-related questions or documentation, please contact your Aptos regional sales manager.

DNA-144-Bifacial Dual Glass

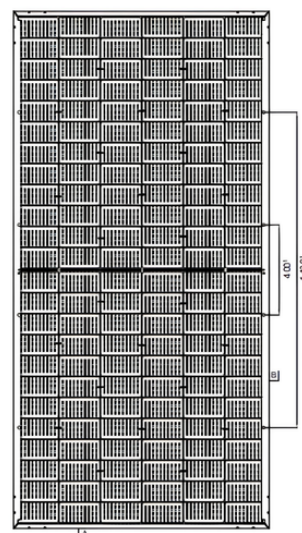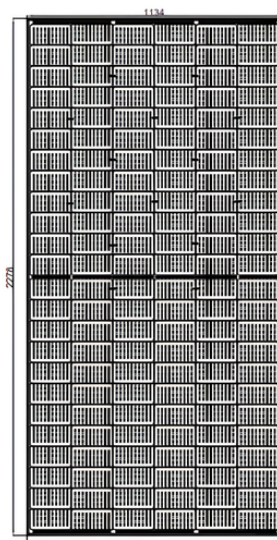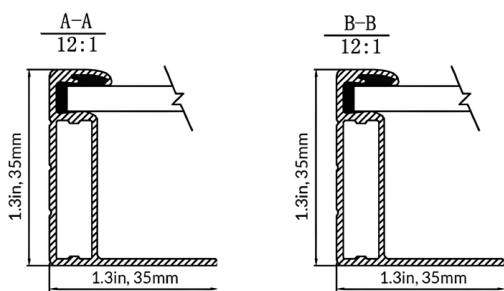

Mechanical Properties

Cell Type	SE-PERC
Glass	Front Glass : 2mm (0.078 in) Rear Glass : 2mm(0.078 in) AR Coating High Transmission Low-Iron Semi-Tempered Dual Glass
Frame	Anodized Aluminum Alloy
Junction Box	IP68
Dimensions	89.68 X 44.6 X 1.3 in, 2278 X 1134 X 35 mm
Weight	71.20 lbs, 32.29 Kg
Output Cable	4mm ² (EU)12AWG
Cable Length	47.2 in, 1200mm
Connector Type	Staubli EVO2

Electrical Specifications

Electrical Specifications	DNA-144-BF10-540W-DG		DNA-144-BF10-545W-DG		DNA-144-BF10-550W-DG	
	STC	NOCT	STC	NOCT	STC	NOCT
Rated Output P _{mp} (W)	540W	404W	545W	408W	550W	411W
Open Circuit Voltage V _{OC} (V)	49.50	46.76	49.70	46.85	49.80	46.93
Short Circuit Current I _{SC} (A)	13.85	12.15	13.92	12.26	13.99	12.33
Rated Voltage V _{mp} (V)	41.70	38.34	41.80	38.41	42.00	38.48
Rated Current I _{max} (A)	12.97	10.54	13.04	10.62	13.11	10.70
Module Efficiency	20.90%		21.09%		21.29%	
STC for front-face of panel: 1000 W/m ² , 25°C, Electrical parameters tolerance ±3% NOCT for front-face of panel: 800W/m ² ,45°C, Wind speed 1 m/s						


Packaging Configuration

Number of Modules per Pallet	31
Number of Pallets per 40ft. Container	20
Pallet Dimensions	91.06 X 44.48 X 49.76 in, 2312.9 X 1129.7 X 1263.9 mm
Pallet Weight (lbs)	2208lbs, 1001.5Kg
Modules per 40ft. Container	620

Temperature Coefficients

Temperature Coefficients P _{mpp}	-0.335%/°C
Temperature Coefficients I _{SC}	+0.036%/°C
Temperature Coefficients V _{OC}	-0.277%/°C
Nominal Operating Cell Temperature (NOCT)	45°C±2°C

I-V Curve

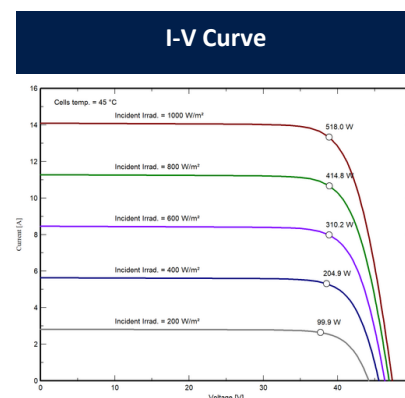

Test Operating Conditions

Maximum Series Fuse	30A
Maximum System Voltage	1,500 VDC (UL&IEC)
Maximum Load Capacity (Per UL 1703)	5400 Pa Snow Load / 5000 Pa Wind Load
Fire Performance Type	Type 29 ²

Bifacial Output-Rearside Power Gain

5%-Maximum Power (Pmax)	567W	572W	578W
5%-Module Efficiency STC(%)	21.94%	22.14%	22.35%
15%-Maximum Power (Pmax)	621W	627W	633W
15%-Module Efficiency STC(%)	24.03%	24.27%	24.50%
25%-Maximum Power (Pmax)	675W	682W	688W
25%-Module Efficiency STC(%)	26.12%	26.40%	26.63%

Ref_08.10.2026



www.aptossolar.com

+1 (949) 932-0733

sales@aptossolar.com

4502 Centerview Dr. Ste. 100
San Antonio, TX 78228

1. Mounting hole locations shown may not reflect actual locations. Top mount clamps are recommended.
2. Aptos Solar Technology uses only high quality materials that result in a Type 29 fire rating at the module level. The fire class rating, however, applies to the complete installed PV system, including module, mounting, roof pitch, and roof type.

Aptos Solar Technology reserves the right to make specification changes without notice.